

oslo

d r a p e r y h a r d w a r e

Curtain Tracking Systems






Series 50 - Milan

USAGE Commercial & domestic tracking. Suits both S-wave & conventional curtains
COLOUR White, platinum, other colours coming soon
CONTROL Hand operation only
TRAVERSE One way or split draw
BRACKETS Easy-clip, ceiling, and face for single and double
BENDING 100mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated and electrophoresis
DIMENSIONS 16 x 16 mm



Series 51

USAGE Commercial & domestic tracking. Suits both S-wave & conventional curtains
COLOUR White, silver, and black powder coat
CONTROL Hand or cord operation (cannot cord draw around bends or curves)
TRAVERSE One way or split draw
BRACKETS Face and ceiling for single and double
BENDING 100mm or 250mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated
DIMENSIONS 20 x 16 mm

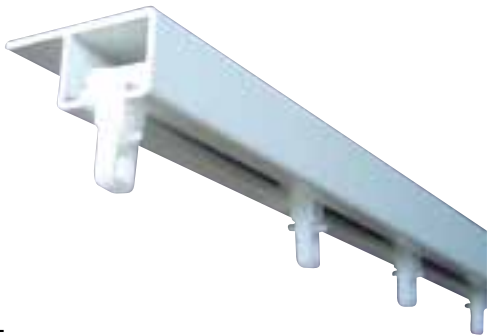

Series 54

USAGE Domestic and commercial tracking. Suits conventional curtains only
COLOUR White
CONTROL Hand
TRAVERSE One way or split draw
BRACKETS Not required
BENDING Not available
CONSTRUCTION Extruded aluminium powder coated
DIMENSIONS 20 x 16 mm / 35 x 16 mm including flange



Series 58 - Slimline

USAGE Commercial & domestic tracking. Suits both S-wave & conventional curtains
COLOUR White, platinum and black powder coat
CONTROL Hand or cord operation (cannot cord draw around bends)
TRAVERSE One way or split draw
BRACKETS Face and ceiling
BENDING 100mm radius bends
CONSTRUCTION Extruded aluminium powder coated and electrophoresis
DIMENSIONS 24 x 11 mm



Series 66

USAGE Decorative rod tracking suiting conventional and S-Wave
COLOUR Brass, antique brass, black, chrome, birch white, anodised - silver
FINIALS Ball, classic, parisian (pictured left to right) plus end cap and others
CONTROL Hand or cord operation
TRAVERSE One way or split draw
BRACKETS Face, dual brackets available to take sheer track behind
BENDING not available
CONSTRUCTION Extruded aluminium powder coated or anodised.
 Available in smooth or reeded.
DIMENSIONS 38 mm diameter section



Series 73

USAGE Domestic tracking. Suits both S-Wave and conventional curtains
COLOUR White, birch white, magnolia
CONTROL Hand or cord operation
TRAVERSE One way or split draw
BRACKETS Face and ceiling for single, dual and triple tracks
BENDING 150mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated
DIMENSIONS 11 x 24 mm



Series 52

USAGE Commercial and domestic tracking. Suits conventional curtains only
COLOUR White and magnolia powder coat
CONTROL Hand or cord operation (cannot cord draw around bends or curves)
TRAVERSE One way or split draw
BRACKETS Face and ceiling for single and double
BENDING 100mm or 250mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated
DIMENSIONS 20 x 16 mm




Series 53

USAGE Lightweight stage tracking for schools and auditoriums
COLOUR White powder coat, clear anodised
CONTROL Hand or cord operation (cannot cord draw around bends or curves)
TRAVERSE One way or split draw
BRACKETS Face and ceiling
BENDING 250mm radius bends
CONSTRUCTION Extruded aluminium powder coated or anodised
DIMENSIONS 30 x 20 mm



Series 61

USAGE Decorative rod for tab or eyelet curtains
COLOUR Stainless steel effect (pictured), black nickel, antique brass, chrome
FINIALS Crazed glass (top). Minister, ribbed, crown, end cap, ball (left to right)
CONTROL Hand operation
TRAVERSE One way or split draw
BRACKETS Face fix, recess, double and passover brackets available in S/Steel
CONSTRUCTION Steel tube
DIMENSIONS 29 mm diameter

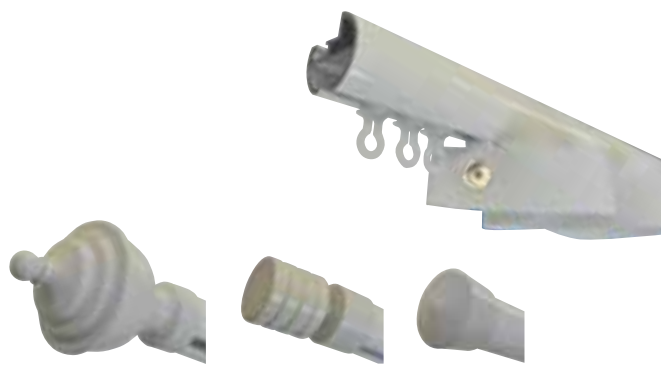

Series 65 - Chadwick

USAGE Decorative rod tracking for both S-wave curtains and conventional styles
COLOUR Anodised, Birch White (pictured), Charcoal Pearl, Citi Pearl, Nickel Pearl, Pewter Pearl, white
FINIALS Minister, ribbed, crown, end cap (pictured left to right)
CONTROL Hand operation, cord operation
TRAVERSE One way or split draw
BRACKETS Face and ceiling style (ceiling can only be used with end caps, not large finials)
CONSTRUCTION Extruded aluminium powder coated or anodised
DIMENSIONS 29 mm diameter




Series 74 - Venice

USAGE Domestic tracking. Suits both S-Wave and conventional curtains
COLOUR White, platinum, other colours coming soon
CONTROL Hand or cord operation
TRAVERSE One way or split draw
BRACKETS Easy-clip, ceiling, and face for single and double
BENDING 150mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated and electrophoresis
DIMENSIONS 11 x 24 mm



Series 79

USAGE Domestic tracking. Suits both S-Wave and conventional curtains
COLOUR White, birch white, magnolia, brass, brown, platinum
CONTROL Hand or cord operation
TRAVERSE One way or split draw
BRACKETS Face and ceiling for single, dual and triple tracks
BENDING 150mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated or anodised
DIMENSIONS 11 x 24 mm

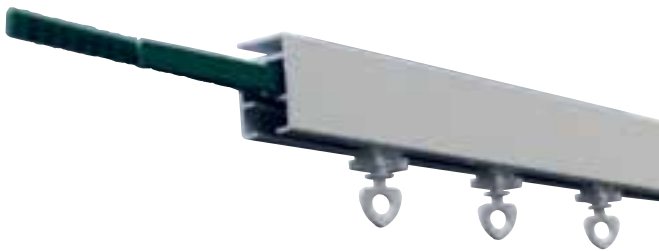


Series 81 - Turbo

USAGE Motorised tracking for conventional and S-Wave curtains
COLOUR White, custom painting available
CONTROL Radio remote control, C-Bus, Home Automation, CAT5 Dry Contact
TRAVERSE One way or split draw
BRACKETS Easy-clip, ceiling, and face for single and double
BENDING 150mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated
MOTORS 240 volt, 75 watt, with electronic limits
DIMENSIONS 17 x 25 mm



Series 84

USAGE Motorised tracking for conventional and S-Wave curtains
COLOUR White, custom painting available
CONTROL Motorised via radio remote and C-Bus, Home Automation
TRAVERSE One way or split draw
BRACKETS Face and ceiling fix
BENDING 300mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated
MOTORS 240 volt, 75 watt, with electronic limits
DIMENSIONS 34 x 22 mm

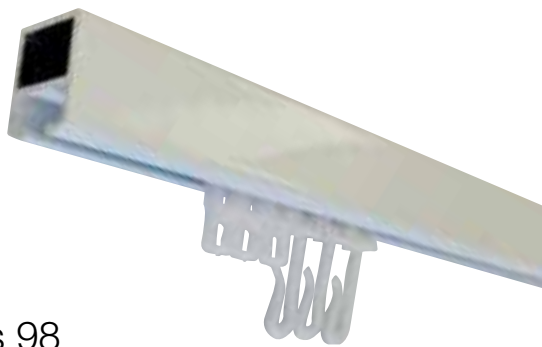

Series 98

USAGE Cubicle and shower tracking. Suits conventional and S-Wave curtains
COLOUR White and clear anodised
CONTROL Hand operation
TRAVERSE One way or split draw
BRACKETS Face and ceiling suspension
BENDING 250mm radius bends and continuous curves
CONSTRUCTION Extruded aluminium powder coated or anodised
DIMENSIONS 20 x 25 mm



Series 99

USAGE Cubicle and shower tracking. Suits conventional and S-Wave curtains
COLOUR White and clear anodised
CONTROL Hand operation
TRAVERSE One way or split draw
BRACKETS Face and ceiling suspension
BENDING 250mm radius bends
CONSTRUCTION Extruded aluminium powder coated or anodised
DIMENSIONS 20 x 38 mm

Please note: Not all states carry the same product range.

Queensland
 2/6 Neston Drive
 Meadowbrook QLD 4131
 T 07 3200 4133
 E sales@osloqld.com.au

New South Wales
 9/19 Chifley Street
 Smithfield NSW 2164
 T 02 9725 5277
 E info@oslonsw.com.au

Victoria
 4/10 Centre Road
 Hallam VIC 3803
 T 03 9703 1155
 E trackco@tpg.com.au

Tasmania
 55 Lampton Ave
 Derwent Park TAS 7009
 T 03 6272 3400
 E helen.armstrong@sanptyltd.com

South Australia
 11/22 Ware Street
 Thebarton SA 5031
 T 08 8352 7688
 E ijs@m2data.com.au

Western Australia
 3/17 Gibberd Road
 Balcatta WA 6021
 T 08 9240 1234
 E orders@traxwest.com.au

New Zealand
 18 Darragh Road, Feilding
 T +64 6 353 0444
 E david@oslo.co.nz

oslo 
 drapery hardware